

RG58 Braided Coaxial Cable

50Ω braided coaxial cable with copper conductor and wire braid shield, widely used in radio communication.

RG58 | 50Ω | 50Ω RG Series Braided Coaxial Cable

Custom lengths, connectors and pre-assembled jumpers are available. Send us your specification for a quotation.

TECHNICAL DATA


Technical parameters

Source: 2026 Technical Selection Manual

STRUCTURE

Inner conductor	bare copper wire 1/0.90±0.01mm
Dielectric	PE 2.95±0.10mm braid bare copper wire 96*0.12mm outer jacket PVC 5.00±0.10mm
Inner conductor	material RG58/U= bare copper /TC; RG58A/U= bare copper /TC; RG58C/U= bare copper /TC insulation material RG58/U= PE; RG58A/U= foam PE; RG58C/U= PE RG58/U bare copper /TC Braiding RG58A/U bare copper /TC Braiding RG58C/U bare copper /TC Braiding shield coverage RG58/U=95%; RG58A/U=95%; RG58C/U=95%
Jacket	material RG58/U= PVC / PE; RG58A/U= PVC / PE; RG58C/U= PVC / PE

ATTENUATION & POWER

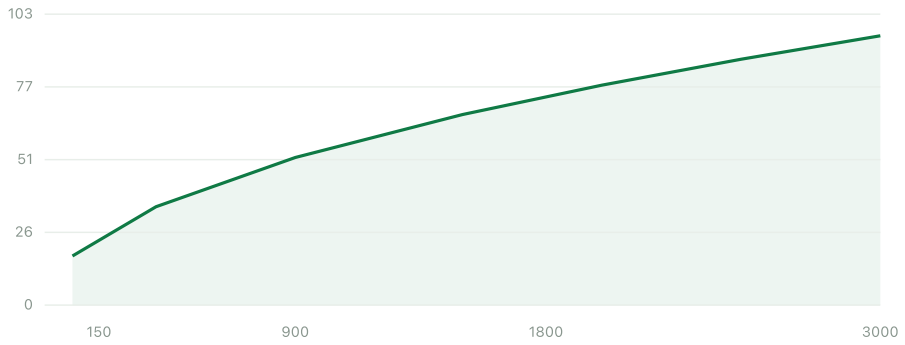

Attenuation in dB/100 m at 20 °C, nominal values (±5%).

MHz	dB/100m	MHz	dB/100m
100	17.39	2000	77.78
400	34.79	2500	86.96
900	52.18	3000	95.26
1500	67.36		

Product description

50Ω braided coaxial cable with copper conductor and wire braid shield, widely used in radio communication. Please contact us for detailed specifications.